

# 低銀ソルダーペースト

Low silver solder paste




## PW231-ST355-GQ-CC

## PW233-ST355-GQ-CC


**低銀なのに常温保管可能!**

Room temperature storage possible in spite of low silver

### 常温保管対応品 Normal Temperature Safekeeping

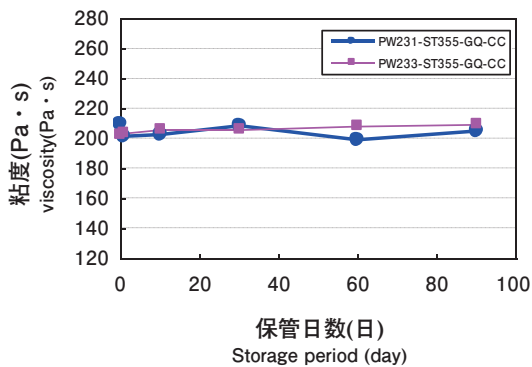


35°C保管90日後の特性確認結果 (PW231-ST355-GQ-CC)  
Characteristics after storage at 35°C (PW231-ST355-GQ-CC)

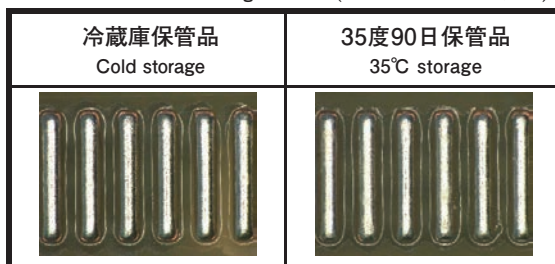


冷蔵保管と同等  
Same as cold storage

### PW231 金属特性 PW231 of alloy characteristic



ヒートサイクル試験結果  
The data of thermal shock test  
(-40°C⇔125°C30min)



衝撃試験結果  
The falling test




QFPリードへの濡れ性  
The wettability the lead of QFP




### PW233 金属特性 PW233 of alloy characteristic



ヒートサイクル試験結果  
The data of thermal shock test  
(-40°C⇔125°C30min)



衝撃試験結果  
The falling test



QFPリードへの濡れ性  
The wettability the lead of QFP



エレクトロニクス時代を支える